



How to Set The Time Manually

Telnote Models TL-1210A, TL-1215A and TL-1225A

1. Enter the manual time set mode by first pressing and holding the ERASE button. This will cause the display to go blank. Be sure to keep holding the ERASE button down continuously during the time setting procedure.

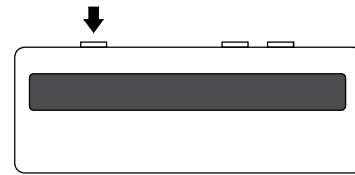


2. While still holding down the ERASE button, press and release the ◀ button. This will cause the time to be displayed.

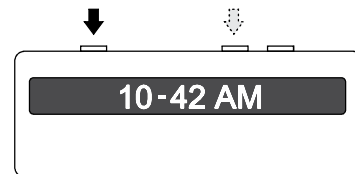


3. Each subsequent press and release of the ◀ button will advance the hours.



4. Each subsequent press and release of the ▶ button will advance the minutes.

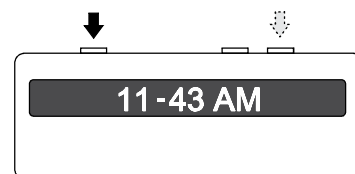

5. When the desired time is set and both the ◀ and ▶ buttons are released, release the ERASE button to finish setting the time.

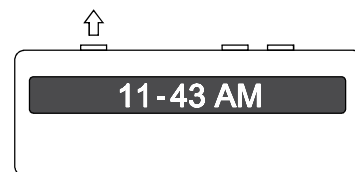

Once the time has been set manually, the Telnote will no longer update the time setting using incoming Caller ID messages.

To return to automatic time setting using incoming Caller ID messages, first power down by unplugging the power connector. Then press either the ◀ button or the ▶ button and hold it down while reconnecting the power. Releasing the button will now re-enable the automatic time set mode.

The automatic time set mode will also return after an extended power outage of 30 minutes to 1 hour.